

NOTES:

IN ACCORDANCE WITH RCW 19.122 "UNDERGROUND UTILITIES", THE CONTRACTOR, PRIOR TO COMMENCING ANY EXCAVATION, SHALL PROVIDE NOTICE OF THE SCHEDULED EXCAVATION TO ALL OWNERS OF UNDERGROUND FACILITIES BY CALLING THE CLARK COUNTY UTILITY COORDINATING COUNCIL'S "ONE CALL" NUMBER 1-800-424-5555. THE NOTICE SHALL BE GIVEN TO THE OWNERS OF THE FACILITIES NOT LESS THAN TWO BUSINESS DAYS OR MORE THAN 10 BUSINESS DAYS BEFORE EXCAVATION. THIS NOTICE SHALL BE PROVIDED PRIOR TO TRENCHING AND EXCAVATION FOR THE FOUNDATION.

THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING CLARK PUBLIC UTILITIES FOR NEW ELECTRICAL SERVICE. FOR CONNECTION TO EXISTING LIGHT POLE, POWER IS TO BE CONNECTED AT THE BASE OF THE LIGHT POLE.

THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ELECTRICAL PERMITS FROM COMMUNITY AND ECONOMIC DEVELOPMENT DEPARTMENT AT 415 W. 6TH ST.

PAGER SYSTEM SHALL BE ELTEC TC2000.

GENERAL NOTES:

SIGN COLORS: PER MUTCD 7B.07 "SCHOOL WARNING SIGNS, INCLUDING THE 'SCHOOL' PORTION OF THE SCHOOL SPEED LIMIT (S5-1) SIGN AND INCLUDING ANY SUPPLEMENTAL PLAQUES USED IN ASSOCIATION WITH THESE WARNING SIGNS, SHALL HAVE A FLUORESCENT YELLOW-GREEN BACKGROUND WITH A BLACK LEGEND AND BORDER UNLESS OTHERWISE PROVIDED IN THIS MANUAL FOR A SPECIFIC SIGN.

SEE **T24-01A SCHOOL FLASHER VIEWS.**


SEE **T24-01C CONTROLLER CABINET DETAIL.**

SEE **T24-01E OPTIONAL MOUNTING AND POWER CONNECTION OPTIONS.**

SEE **T24-01D WIRING DIAGRAM.**

CONSTRUCTION NOTES:

- ① CITY OF VANCOUVER TYPE I STANDARD 12'-6" IN LENGTH.
- ② SEE **T24-01C CONTROLLER CABINET DETAIL.**
- ③ 1 1/2" DIA. CONDUIT.
- ④ SEE INDICATION LIGHT DETAIL.
- ⑤ TOP MOUNT SEE WSDOT DETAIL J-21.16.

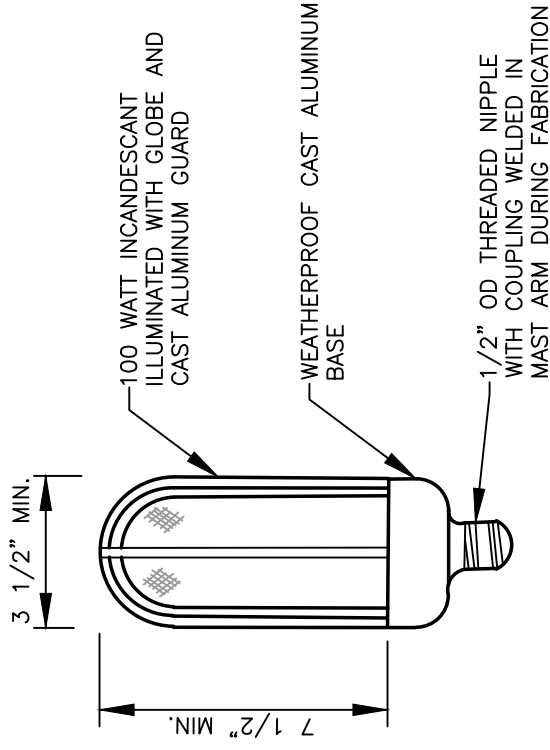

INDICATION LIGHT DETAIL

REV. NO.	DATE	BY	APPR.	DESCRIPTION
1	2/21	OS	CJC	PUBLIC WORKS - STREETS AND TRANSPORTATION
2	9/21	RAW	CJC	

APPROVED BY: *[Signature]* TRAFFIC ENGINEER MANAGER
 APPROVED DATE: 9/1/2021



SCHOOL FLASHER STANDARD DETAIL
 CONSTRUCTION NOTES AND
 INDICATOR LIGHT DETAIL
 STANDARD PLAN NUMBER
 T24-01B