




NOTES:

1. FINISH SHALL BE LIGHT BROOM PERPENDICULAR TO PEDESTRIAN TRAFFIC UNLESS OTHERWISE NOTED.
2. SIDEWALK PATTERN APPLIES TO FOURTH PLAIN BOULEVARD "VILLAGE" DESIGN AREA.
3. SCORE LINES SHALL BE CRISP AND WITHOUT SHINERS.

REV NO.	DATE	BY	APPR	PUBLIC WORKS - STREETS AND TRANSPORTATION
1	8/08	RAW	MHA	
2	7/14	RAW	MHA	
3	3/17	RAW	MHA	
4	9/21	RAW	MHA	
APPROVED BY: <i>M. H. Pedraza</i>				ENGINEER MANAGER
APPROVED DATE: 9/1/2021				

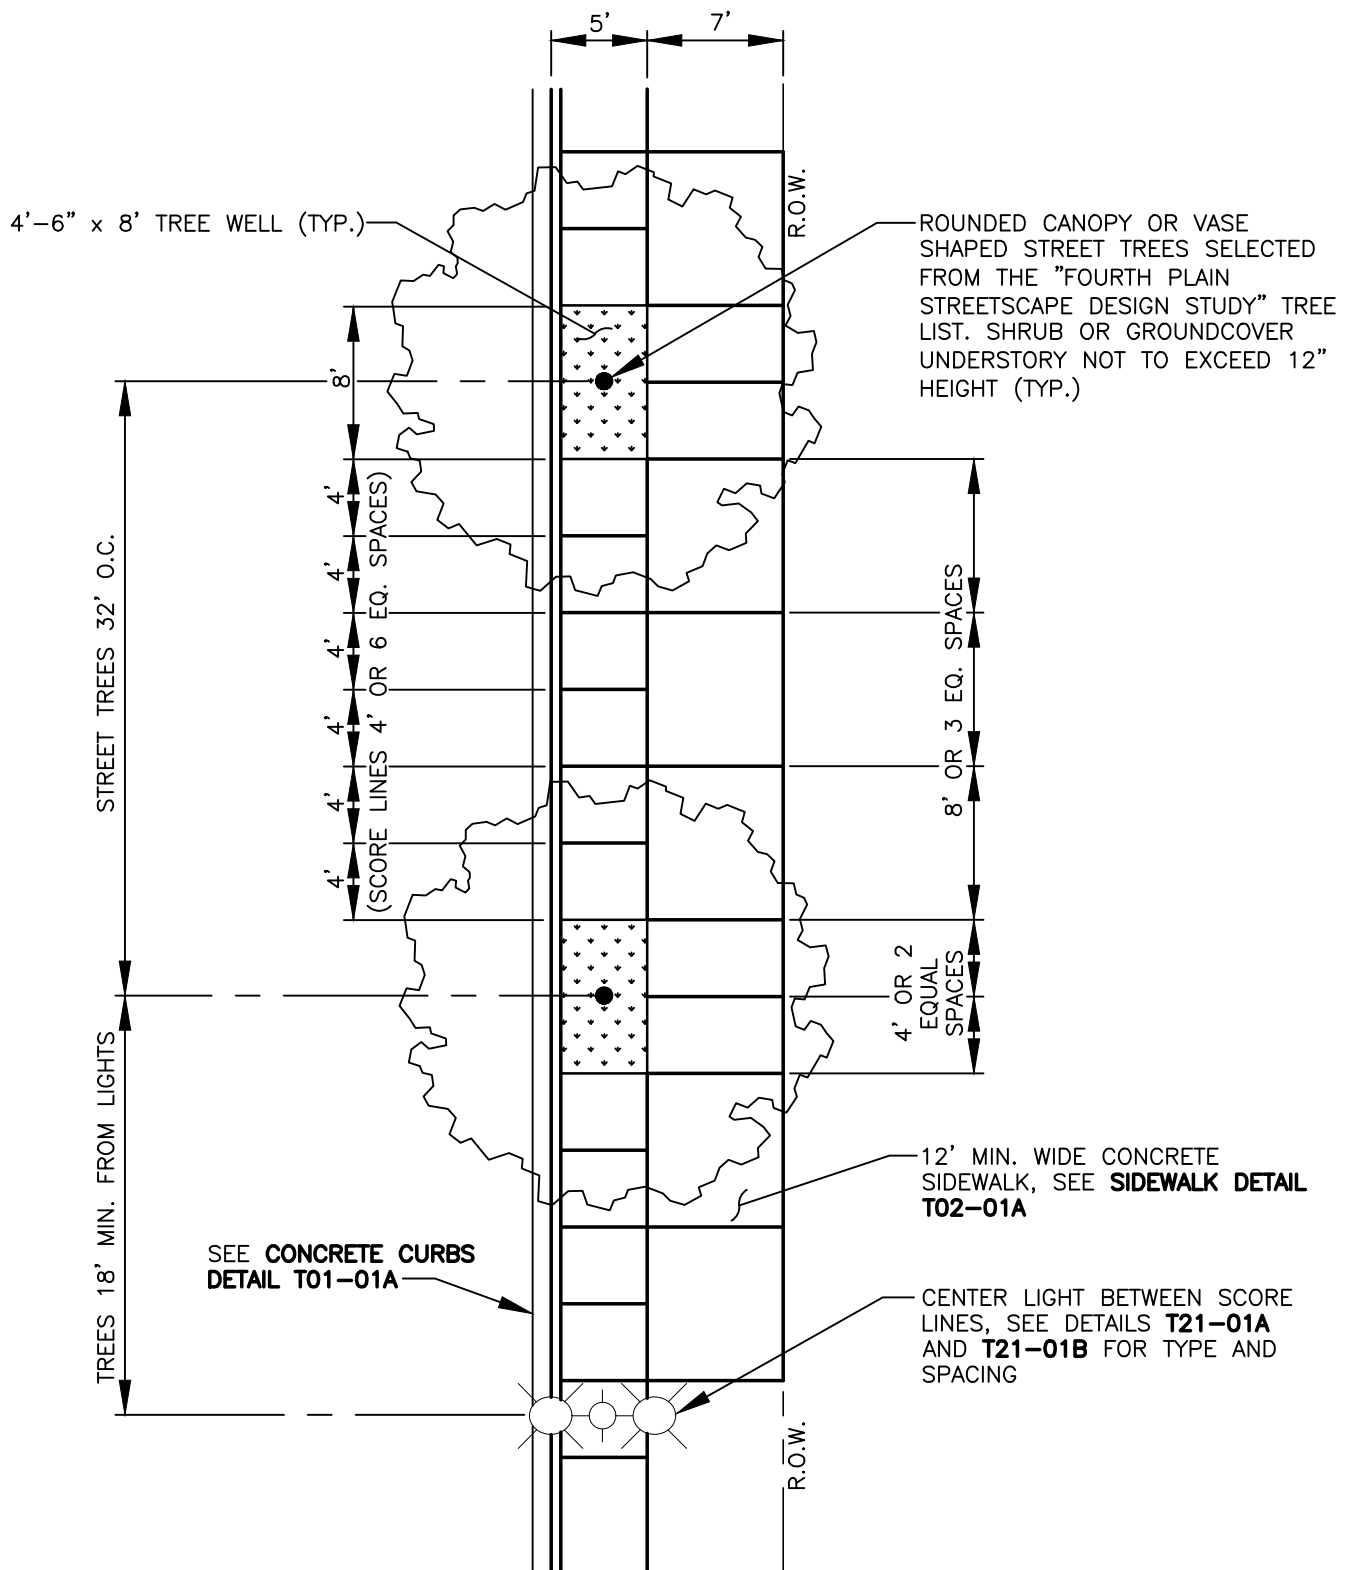

FOURTH PLAIN
BOULEVARD
"VILLAGE" SIDEWALK

STANDARD PLAN
NUMBER
T06-01

12' MIN. SIDEWALK AT MID-BLOCK, SEE **FOURTH PLAIN BOULEVARD "VILLAGE" SIDEWALK DETAIL T06-01**

BENCH: ALIGN CENTER OF BENCH WITH SCORE LINE NEAREST TO TREE WELL. BACK OF BENCH 6" MIN. AND 1'-6" MAX. FROM BACK OF SIDEWALK

TREE BOSQUE FEATURE: SPRING FLOWERING TREES WITH ROUNDED CANOPY (TYP.)

ROUNDED CANOPY OR VASE SHAPED STREET TREES SELECTED FROM THE "FOURTH PLAIN STREETSCAPE DESIGN STUDY" TREE LIST. SHRUB OR GROUNDCOVER UNDERSTORY NOT TO EXCEED 12" HEIGHT (TYP.)

TRANSITION FROM 12' TO 15' WIDTH BEGINS AND ENDS AT SCORE LINES, 2' MIN. 3' MAX.

TWO FULL SCORE LINES AT 8' WIDTH BEFORE TREE WELLS

R.O.W.

16' OR 2 EQ. SPACES

EFFECTIVE PEDESTRIAN CLEAR SPACE (7'-6" MIN.)

PARTIALLY PAVED TREE WELL 4'-6" x 8' INCLUDING PAVERS. (TYP.), SEE **PAVER AT TREE WELL AND PLANTER STRIP DETAIL T06-07** AND **TREE WELL AND PAVER EDGE INSTALLATION DETAIL T02-03**

STAPLE STYLE BIKE RACK, CENTERED BETWEEN SCORE LINES, CENTER 18' MIN. FROM CROSSWALK 2'-6" FROM BACK OF CURB (TYP.)

SEE **SIGHT DISTANCE REQUIREMENTS FOR CONTROLLED INTERSECTIONS DETAIL T04-03** AND **VISION CLEARANCE TRIANGLE DETAIL T04-04**

CENTER LIGHT BETWEEN SCORE LINES (TYP.), SEE **DETAIL T21-01A** AND **T21-01B** FOR TYPE AND SPACING

15' MIN. WIDTH SIDEWALK AT INTERSECTIONS (TYP.) SEE **SIDEWALK DETAIL T02-01A**

CURB RAMP (TYP.), SEE DETAILS **T02-04A** TO **T02-05B** FOR ADA RAMP OPTIONS

SEE **CONCRETE CURBS DETAIL T01-01A**

NOTES:

1. FINISH SHALL BE LIGHT BROOM PERPENDICULAR TO PEDESTRIAN TRAFFIC UNLESS OTHERWISE NOTED. TRUNCATED DOME COLOR BLACK OR GREY.
2. SIDEWALK PATTERN APPLIES TO FOURTH PLAIN BOULEVARD "VILLAGE" DESIGN AREA.
3. SCORE LINES SHALL BE CRISP AND WITHOUT SHINERS.

REV NO.	DATE	BY	APPR	PUBLIC WORKS - STREETS AND TRANSPORTATION
1	8/08	RAW	MHA	
2	7/14	RAW	MHA	
3	3/17	RAW	MHA	
4	9/21	RAW	MHA	

APPROVED BY: *M.H. Pedraza*
ENGINEER MANAGER
APPROVED DATE: 9/1/2021

CITY OF
Vancouver
WASHINGTON

FOURTH PLAIN
BOULEVARD "VILLAGE" CORNER
WITHOUT BUS STOP

STANDARD PLAN
NUMBER

T06-02

ROUNDED CANOPY OR VASE SHAPED STREET TREES SELECTED FROM THE "FOURTH PLAIN STREETSCAPE DESIGN STUDY" TREE LIST. SHRUB OR GROUNDCOVER UNDERSTORY NOT TO EXCEED 12" HEIGHT (TYP.)

BENCH: ALIGN CENTER OF BENCH WITH SCORE LINE NEAREST TO TREE WELL. BACK OF BENCH 6" MIN. AND 1'-6" MAX. FROM BACK OF SIDEWALK

STAPLE STYLE BIKE RACK, CENTERED BETWEEN SCORE LINES, CENTER MIN. 14' FROM BUS STOP, 2'-6" FROM BACK OF CURB (TYP.)

STANDARD COV CURB OR CURB AND GUTTER, SEE **DETAIL T01-01**

CENTER LIGHT BETWEEN SCORE LINES, SEE **DETAIL T21-01A** AND **T21-01B** FOR TYPE AND SPACING (TYP.)

SEE **CONCRETE CURBS** **DETAIL T01-01A**

12' MIN. SIDEWALK AT MID-BLOCK, SEE **FOURTH PLAIN BOULEVARD "VILLAGE" SIDEWALK DETAIL T06-01**

TRANSITION FROM 12' TO 15' WIDTH BEGINS AND ENDS AT SCORE LINES, 2' MIN. 3' MAX.

TWO FULL SCORE LINES AT 8' WIDTH BEFORE TREE WELLS

EFFECTIVE PEDESTRIAN CLEAR SPACE (7'-6" MIN.)

PARTIALLY PAVED TREE WELL 4'-6" x 8' INCLUDING PAVERS (TYP.), SEE **PAVER AT TREE WELL AND PLANTER STRIP DETAIL T06-07** AND **TREE WELL AND PAVER EDGE INSTALLATION DETAIL T02-03**

TREE BOSQUE FEATURE: SPRING FLOWERING TREES WITH ROUNDED CANOPY (TYP.)

SHELTER LOCATION PER C-TRAN

SEE **SIGHT DISTANCE REQUIREMENTS FOR CONTROLLED INTERSECTIONS DETAIL T04-03** AND **VISION CLEARANCE TRIANGLE DETAIL T04-04**

15' MIN. WIDTH SIDEWALK AT INTERSECTIONS (TYP.) SEE **SIDEWALK DETAIL T02-01A**

NOTES:

1. FINISH SHALL BE LIGHT BROOM PERPENDICULAR TO PEDESTRIAN TRAFFIC UNLESS OTHERWISE NOTED. TRUNCATED DOME COLOR BLACK OR GREY.
2. SIDEWALK PATTERN APPLIES TO FOURTH PLAIN BOULEVARD "VILLAGE" DESIGN AREA.
3. SCORE LINES SHALL BE CRISP AND WITHOUT SHINERS.

REV NO.	DATE	BY	APPR	PUBLIC WORKS - STREETS AND TRANSPORTATION
1	8/08	RAW	MHA	
2	7/14	RAW	MHA	
3	3/17	RAW	MHA	
4	9/21	RAW	MHA	

APPROVED BY: *M. H. Pedraza*
ENGINEER MANAGER
APPROVED DATE: 9/1/2021

CITY OF
Vancouver
WASHINGTON

FOURTH PLAIN
BOULEVARD "VILLAGE" CORNER
WITH BUS STOP

STANDARD PLAN
NUMBER

T06-03

PARTIALLY PAVED TREE WELL 4'-6" x 8' INCLUDING PAVERS (TYP.), SEE **PAVER AT TREE WELL AND PLANTER STRIP DETAIL T06-07** AND **TREE WELL AND PAVER EDGE INSTALLATION DETAIL T02-03**

OPTION A
(MIN. WIDTHS)

NOTES:

1. FINISH SHALL BE LIGHT BROOM PERPENDICULAR TO PEDESTRIAN TRAFFIC UNLESS OTHERWISE NOTED. TRUNCATED DOME COLOR BLACK OR GREY.
2. SIDEWALK PATTERN APPLIES TO FOURTH PLAIN BOULEVARD "GREEN NECKLACE" DESIGN AREA.
3. SCORE LINES SHALL BE CRISP AND WITHOUT SHINERS.

12' OPTIMUM WIDTH (SEE **OPTION A** FOR MIN. WIDTHS) SEE **SIDEWALK DETAIL T02-01A**

CONTINUOUS PLANTER STRIP AT MID-BLOCK. SHRUB OR GROUND COVER (NO SOD) UNDERSTORY NOT TO EXCEED 12" HEIGHT (TYP.)

CONCRETE SIDEWALK WITH SCORE LINE EVERY 8' NOMINAL. LIGHT BROOM FINISH PERPENDICULAR TO PEDESTRIAN TRAVEL

7' PEDESTRIAN CLEAR SPACE

ROUNDED CANOPY OR VASE SHAPED STREET TREES SELECTED FROM THE "FOURTH PLAIN STREETSCAPE DESIGN STUDY" TREE LIST. SHRUB OR GROUND COVER UNDERSTORY NOT TO EXCEED 12" HEIGHT (TYP.)

SEE **CONCRETE CURBS DETAIL T01-01A**

SEE **SIGHT DISTANCE REQUIREMENTS FOR CONTROLLED INTERSECTIONS DETAIL T04-03** AND **VISION CLEARANCE TRIANGLE DETAIL T04-04**

I:\CITYAPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T06-04


REV NO.	DATE	BY	APPR	PUBLIC WORKS - STREETS AND TRANSPORTATION
1	8/08	RAW	MHA	
2	7/14	RAW	MHA	
3	3/17	RAW	MHA	
4	9/21	RAW	MHA	
APPROVED BY: <i>M. H. Pedraza</i>				ENGINEER MANAGER
APPROVED DATE: 9/1/2021				

CITY OF
Vancouver
WASHINGTON

FOURTH PLAIN
BOULEVARD "GREEN NECKLACE"
SIDEWALK NORTH SIDE

STANDARD PLAN
NUMBER


T06-04

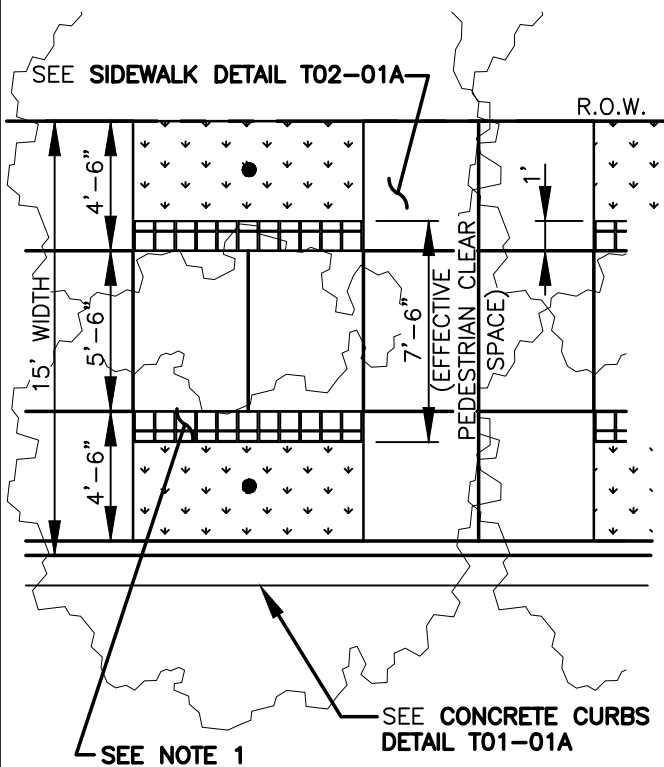


BOSQUE FEATURE: PAVER AT TREE WELL
NO SCALE

NOTE:


- (1) ROW EACH OF SINGLE AND DOUBLE HOLLAND PAVERS, LAID AS SHOWN, EQUAL SPACING. SEE **SECTION A-A** THIS DRAWING. COLOR: CHARCOAL WITH STANDARD FINISH.

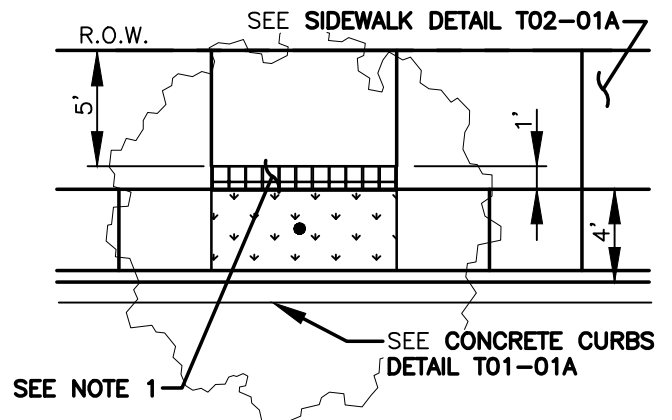

GREEN NECKLACE NORTH AND COMMERCIAL STREET: PAVER AT TREE WELL

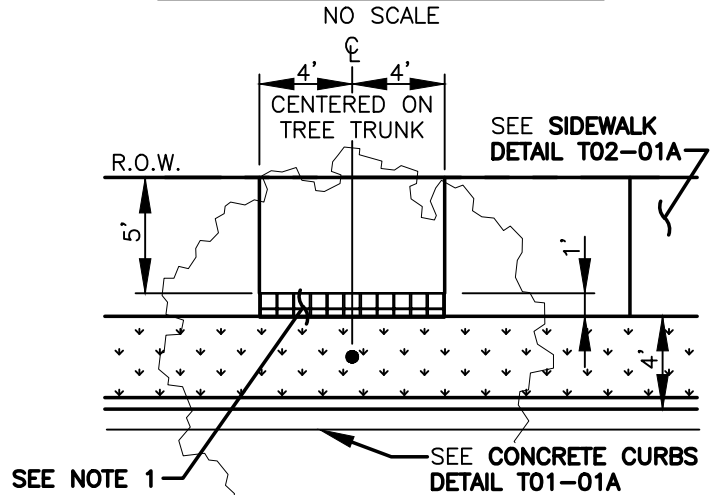

GREEN NECKLACE NORTH: PAVER AT PLANTER STRIP
NO SCALE

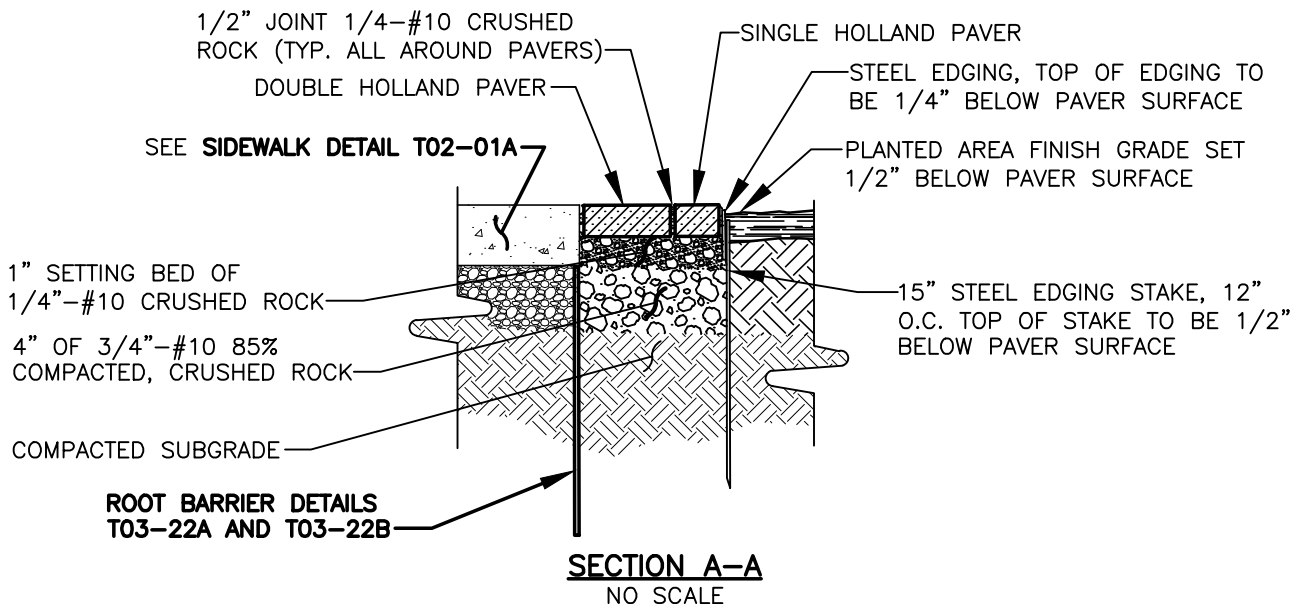

SECTION A-A
NO SCALE

I:\CITYPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T06-07


REV NO.	DATE	BY	APPR	PUBLIC WORKS - STREETS AND TRANSPORTATION
1	8/08	RAW	MHA	
2	7/14	RAW	MHA	
3	3/17	RAW	MHA	
4	9/21	RAW	MHA	

APPROVED BY: *M.H. Pedraza*
ENGINEER MANAGER
APPROVED DATE: 9/1/2021


CITY OF
Vancouver
WASHINGTON

FOURTH PLAIN BOULEVARD
PAVER AT TREE WELL
AND PLANTER STRIP

STANDARD PLAN
NUMBER
T06-07

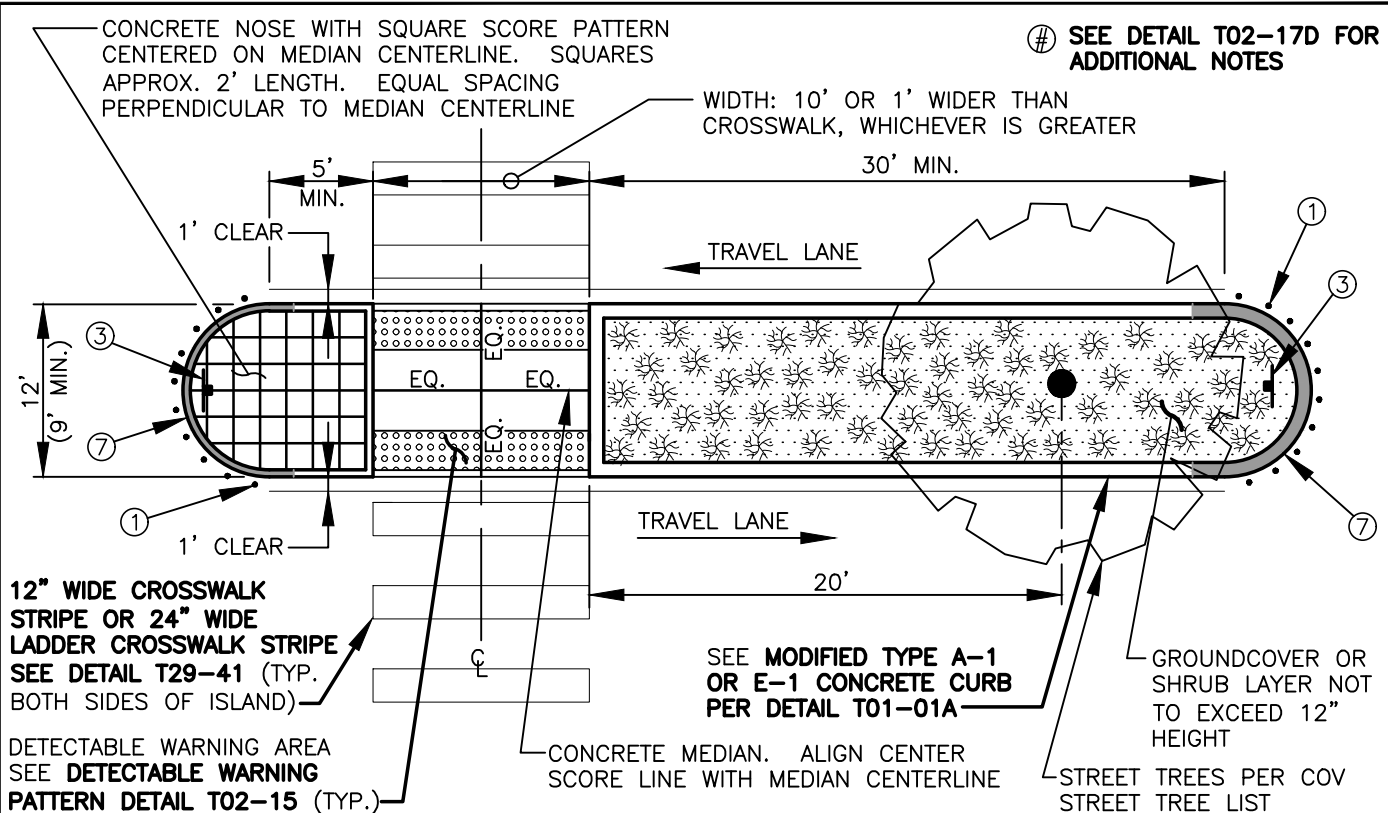

REFUGE ISLAND
NO SCALE

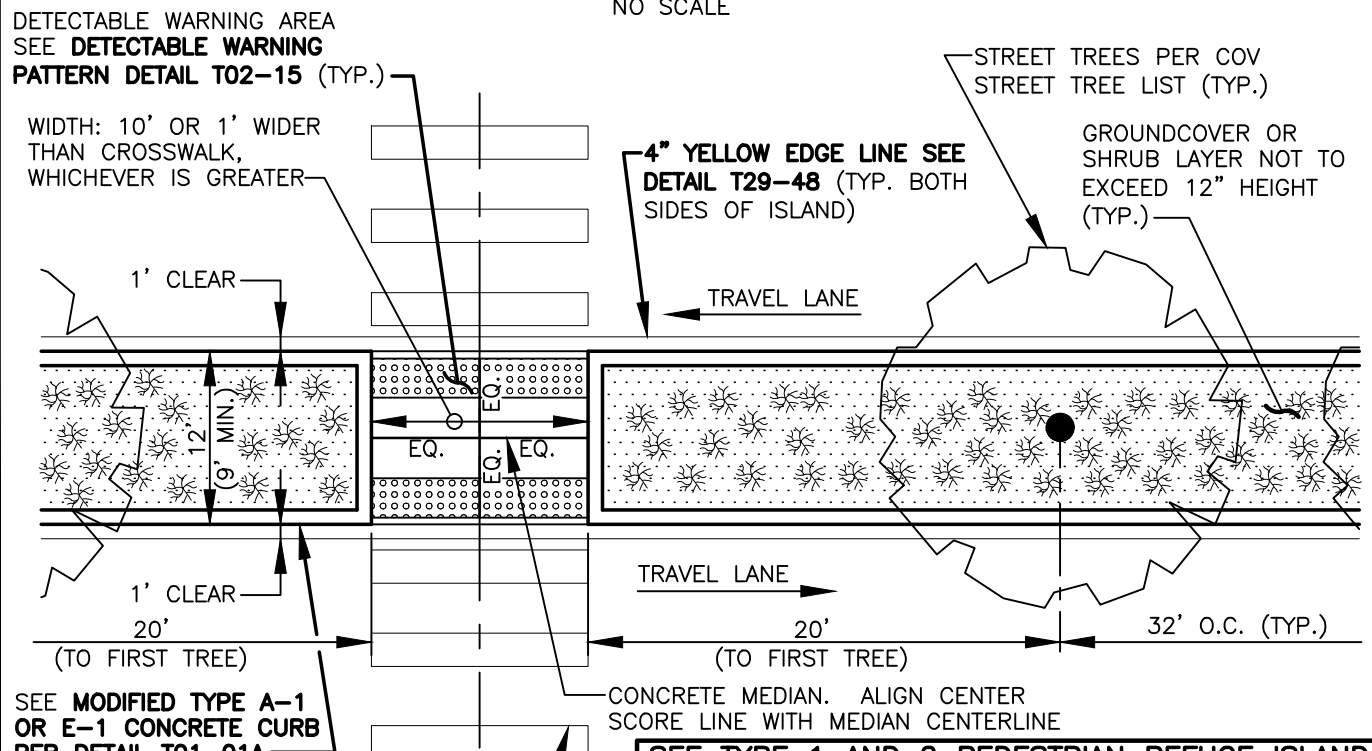

SEE TYPE 1 AND 2 PEDESTRIAN REFUGE ISLAND DETAILS ON COV STD. PLANS T02-17A AND T02-17B FOR ADDITIONAL INFORMATION. SEE TYPICAL PEDESTRIAN REFUGE ISLAND SECTIONS ON COV STD. PLAN T02-17C. SEE TYPICAL PEDESTRIAN REFUGE ISLAND NOTES ON COV STD. PLAN T02-17D.

MEDIAN OPENING
NO SCALE

I:\CITYAPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T06-08

REV NO.	DATE	BY	APPR
1	8/08	RAW	MHA
2	7/14	RAW	MHA
3	3/17	RAW	MHA
4	9/21	RAW	MHA

PUBLIC WORKS – STREETS AND TRANSPORTATION

APPROVED BY: *M.H. Pedraza*
ENGINEER MANAGER

APPROVED DATE: 9/1/2021



**FOURTH PLAIN BOULEVARD
PEDESTRIAN ACCESS AT
UNSIGNALIZED LOCATIONS**

**STANDARD PLAN
NUMBER**

T06-08