


OPTION A

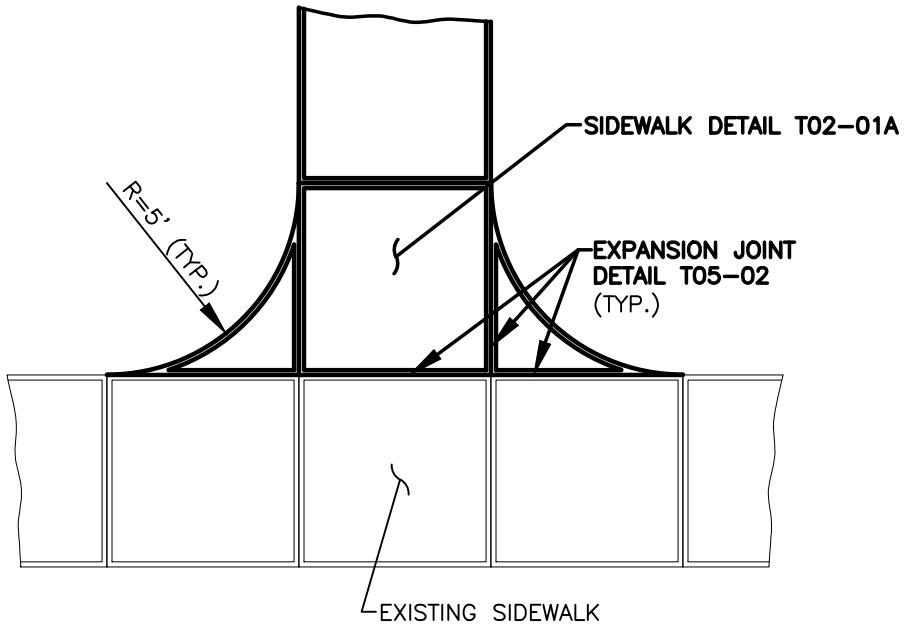

OPTION B

NOTES:

1. CONCRETE SHALL BE 3000 PSI MIN. (CL 3000), 3 1/2" SLUMP (MAX.).
2. COMPACT SUBGRADE AND CRUSHED SURFACING TOP COURSE TO 95% OF MAXIMUM DRY DENSITY (3" MIN. DEPTH).
3. FINISH SHALL BE MEDIUM BROOM PERPENDICULAR TO PEDESTRIAN TRAFFIC UNLESS OTHERWISE DIRECTED.
4. 2" SMOOTH FINISH BORDER AROUND EACH SIDEWALK PANEL OR MATCH EXISTING BORDER.
5. SEE **CONCRETE JOINTS DETAIL T05-02** FOR SURFACE, CONTRACTION, AND EXPANSION JOINTS.

INTERSECTINGSIDEWALK DETAIL



CITY OF VANCOUVER
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION DIVISION

DRAWN BY	APPROVED BY	APPROVAL DATE
CDC	<i>M.H.H.</i>	8/04
REVISION	APPROVED BY	APPROVAL DATE
7	<i>M.H.H.</i>	3/24

STD. PLAN NO.
T02-01B