

NOTES:

IN ACCORDANCE WITH RCW 19.122 "UNDERGROUND UTILITIES", THE CONTRACTOR, PRIOR TO COMMENCING ANY EXCAVATION, SHALL PROVIDE NOTICE OF THE SCHEDULED EXCAVATION TO ALL OWNERS OF UNDERGROUND FACILITIES BY CALLING THE CLARK COUNTY UTILITY COORDINATING COUNCIL'S "ONE CALL" NUMBER 1-800-424-5555. THE NOTICE SHALL BE GIVEN TO THE OWNERS OF THE FACILITIES NOT LESS THAN TWO BUSINESS DAYS OR MORE THAN 10 BUSINESS DAYS BEFORE EXCAVATION. THIS NOTICE SHALL BE PROVIDED PRIOR TO TRENCHING AND EXCAVATION FOR THE FOUNDATION.

THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING CLARK PUBLIC UTILITIES FOR NEW ELECTRICAL SERVICE. FOR CONNECTION TO EXISTING LIGHT POLE, POWER IS TO BE CONNECTED AT THE BASE OF THE LIGHT POLE.

THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ELECTRICAL PERMITS FROM COMMUNITY AND ECONOMIC DEVELOPMENT DEPARTMENT AT 415 W. 6TH ST.

PAGER SYSTEM SHALL BE ELTEC TC2000.


GENERAL NOTES:

SIGN COLORS: PER MUTCD 7B.07 "SCHOOL WARNING SIGNS, INCLUDING THE 'SCHOOL' PORTION OF THE SCHOOL SPEED LIMIT (S5-1) SIGN AND INCLUDING ANY SUPPLEMENTAL PLAQUES USED IN ASSOCIATION WITH THESE WARNING SIGNS, SHALL HAVE A FLUORESCENT YELLOW-GREEN BACKGROUND WITH A BLACK LEGEND AND BORDER UNLESS OTHERWISE PROVIDED IN THIS MANUAL FOR A SPECIFIC SIGN.

- SEE T24-01A SCHOOL FLASHER VIEWS.
- SEE T24-01C CONTROLLER CABINET DETAIL.
- SEE T24-01E OPTIONAL MOUNTING AND POWER CONNECTION OPTIONS.
- SEE T24-01D WIRING DIAGRAM.

CONSTRUCTION NOTES:

- ① CITY OF VANCOUVER TYPE I STANDARD 12'-6" IN LENGTH.
- ② SEE T24-01C CONTROLLER CABINET DETAIL.
- ③ 1 1/2" DIA. CONDUIT.
- ④ SEE INDICATION LIGHT DETAIL.
- ⑤ TOP MOUNT SEE WSDOT DETAIL J-21.16.

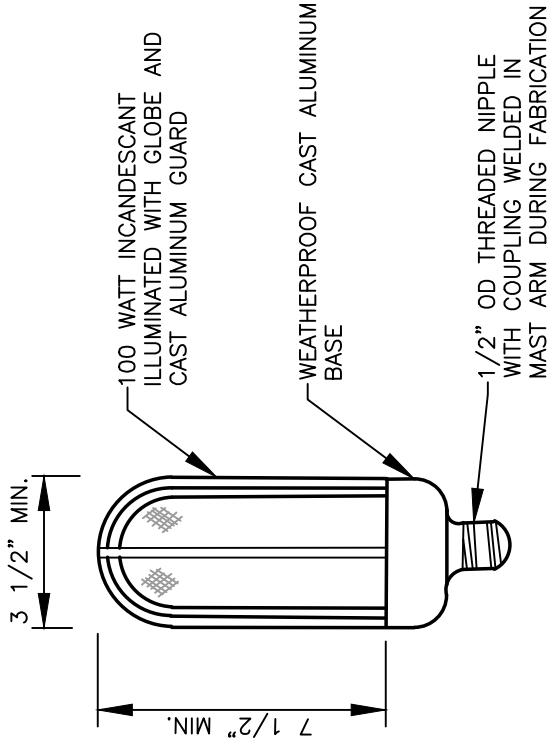

INDICATION LIGHT DETAIL



**SCHOOL FLASHER STANDARD DETAIL
CONSTRUCTION NOTES AND INDICATOR LIGHT DETAIL**

CITY OF VANCOUVER
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION DIVISION

DRAWN BY	APPROVED BY	APPROVAL DATE	STD. PLAN NO. T24-01B
CDC	[Signature]	2/21	
REVISION	APPROVED BY	APPROVAL DATE	
3	[Signature]	3/24	