


"ANGLED" INTERSECTIONS

STREET NAME SIGNS SHALL BE ERECTED AT "ANGLED" INTERSECTIONS INSIDE THE OUTER CURB LINES OF THE TWO INTERSECTING STREETS. THEY SHALL BE MOUNTED 10 FEET OR LESS FROM THE DIVIDING LINE BETWEEN STREETS, OTHERWISE SIGNS WILL BE MOUNTED AS CLOSE AS POSSIBLE TO THE "T" LEG CENTER LINE PROJECTION. FOR ADDITIONAL SIGN INFORMATION, SEE **GROUND MOUNTED STREET NAME SIGN DETAIL, T29-01.**

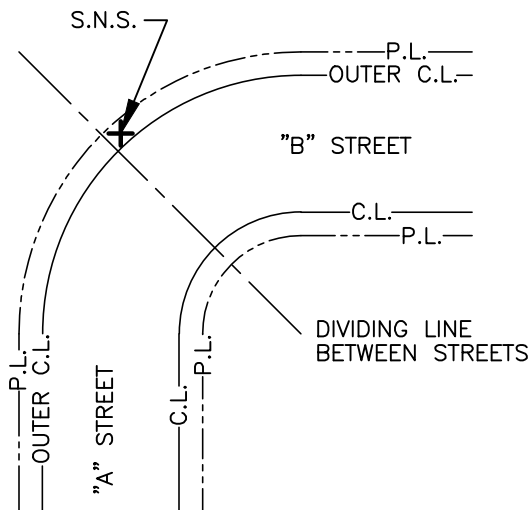

"CURVED" INTERSECTIONS

STREET NAME SIGNS SHALL BE ERECTED AT "CURVED" INTERSECTIONS INSIDE THE OUTER CURB LINES OF THE TWO INTERSECTING STREETS. THEY SHALL BE MOUNTED BETWEEN THE TWO HOUSES ALONG THE OUTER PROPERTY LINE BETWEEN WHICH N-S HOUSE NUMBERS CHANGE TO E-W HOUSE NUMBERS, OR BETWEEN OUTER PROPERTY LINE HOUSES BETWEEN WHICH HOUSE NUMBERS CHANGE FROM ODD TO EVEN NUMBERS. IF HOUSES ARE NOT BUILT ALONG THE OUTER PROPERTY LINE, SIGNS SHALL BE MOUNTED IN THE MIDDLE OF THE CURB INSIDE THE OUTER CURB LINE. FOR ADDITIONAL SIGN INFORMATION, SEE **GROUND MOUNTED STREET NAME SIGN DETAIL, T29-01.**

I:\CITYPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T29-06

REV. NO.	DATE	BY	APPR	AGE
1	1/05	RAW		AGE
2	3/06	RAW		AGE
3	2/07	RAW		AGE
4	8/08	RAW		AGE
5	1/15	RAW	CJC	
6	9/21	RAW	CJC	

PUBLIC WORKS - STREETS AND TRANSPORTATION

APPROVED BY: *[Signature]*
TRAFFIC ENGINEER MANAGER

APPROVED DATE: 9/1/2021



STREET NAME SIGN PLACEMENT AT ANGLED AND CURVED INTERSECTIONS	STANDARD PLAN NUMBER T29-06
---	--------------------------------