


PERPENDICULAR ADA RAMP BRICK UNIT PAVERS (20' RADIUS OR SMALLER)

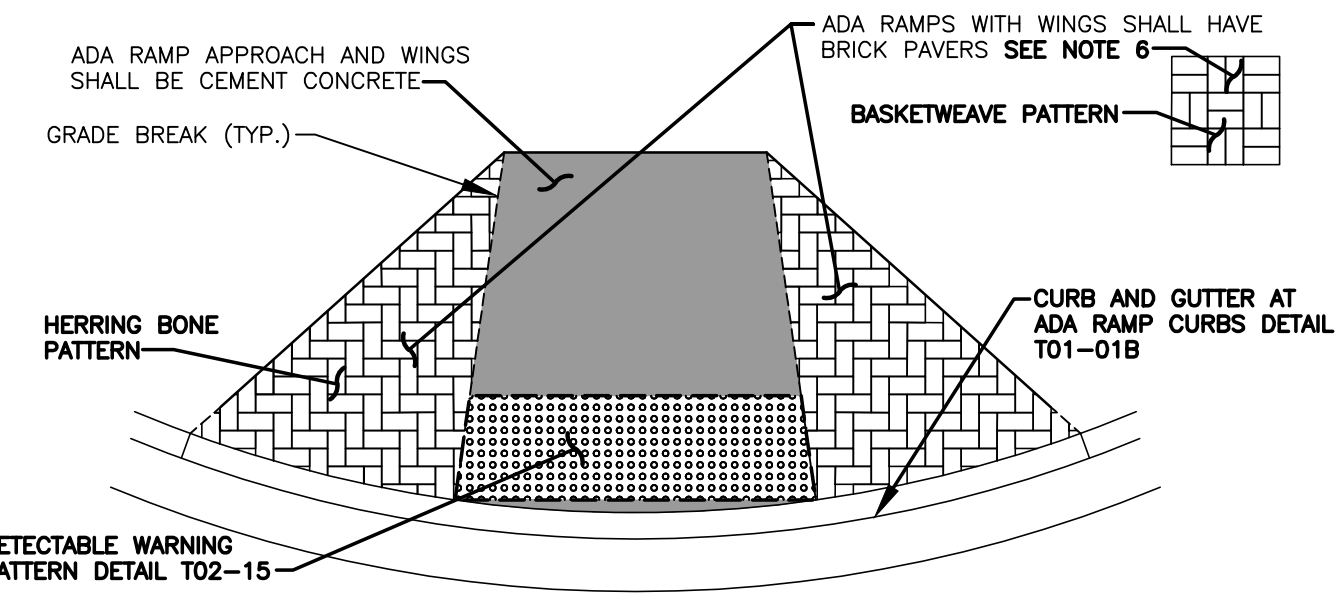

WINGED ADA RAMP BRICK UNIT PAVERS (25' RADIUS OR LARGER)

NOTES:

1. SAMPLE OF BRICK AND MORTAR COLOR SHALL BE APPROVED BY THE CITY ENGINEER PRIOR TO CONSTRUCTION. BRICK MANUFACTURED BY MUTUAL MATERIALS, "BURGUNDY-MICA TILE" OR ENDICOTT "MEDIUM IRONSPOT #46", PREMIXED MORTAR ASTM C270, TYPE S, 1800 PSI 28 DAY STRENGTH OR APPROVED EQUAL.
2. THE BRICK PATTERN IS REQUIRED FOR ALL RAMPS IN AREAS ZONED CITY CENTER OR WHERE THE HERITAGE SIDEWALK IS CONSTRUCTED.
3. SURFACE JOINT NOT REQUIRED WHEN USING BRICK PAVERS. TRANSITION TO FIT BETWEEN GRADES.
4. THE DETECTABLE WARNING PATTERN (TRUNCATED DOMES) SHALL BE WHITE ON THE BRICK UNIT PAVER PATTERN.
5. RAMP WINGS MAY BE REPLACED WITH A MONOLITHIC CURB **ADA CURB RAMPS DETAIL T01-01B** IF OBSTRUCTION OR PLANTER PREVENTS PEDESTRIAN TRAFFIC IN WING AREA.
6. RAMP WING BRICK PATTERN OPTIONS ARE EITHER HERRING BONE OR BASKET WEAVE PATTERNS.

I:\CITYAPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T02-16.DWG



BRICK UNIT PAVER PATTERN			STD. PLAN NO. T02-16
CITY OF VANCOUVER DEPARTMENT OF PUBLIC WORKS TRANSPORTATION DIVISION		DRAWN BY CDC	
		REVISION 7	APPROVAL DATE 3/24