


TOP VIEW - BOLT PATTERN AND STRUCTURAL SUPPORT

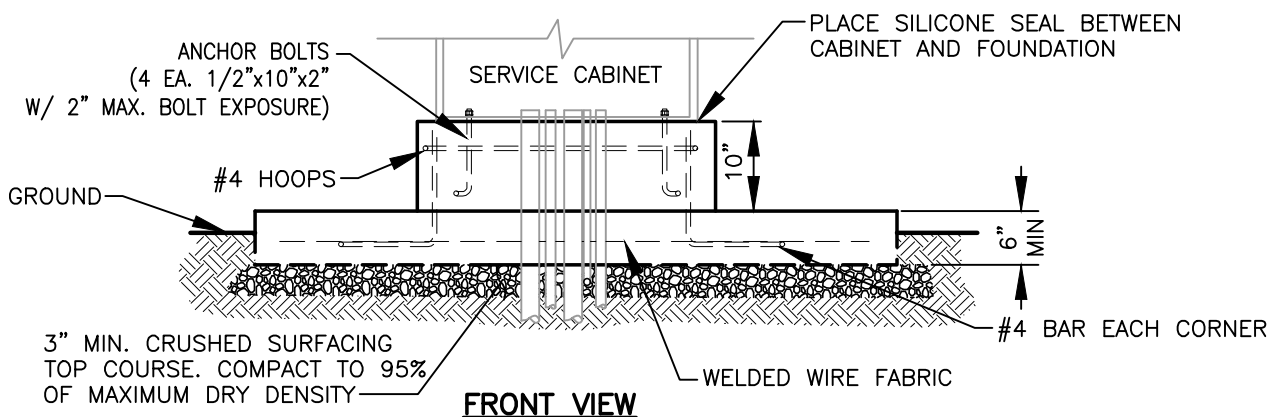

FRONT VIEW

NOTES:

1. 2" MINIMUM OF CONCRETE COVER ON ALL STRUCTURAL SUPPORT BARS.
2. CONDUITS SHALL EXTEND 2" MIN. AND 3" MAX. ABOVE CONCRETE MEASURED TO END OF BELL OR GROUND BUSHING.
3. ENSURE ALL DOORS CAN SWING OPEN 180 DEGREES.
4. 18" MINIMUM CLEARANCE ON RIGHT SIDE TO ENSURE INTERNAL PHOTOCELL FUNCTIONALITY.
5. SEE WSDOT STD. PLAN J-10.10 FOR SPECIFICATIONS.

TRAFFIC SIGNAL SERVICE CABINET FOUNDATION



CITY OF VANCOUVER
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION DIVISION

DRAWN BY	APPROVED BY	APPROVAL DATE
CDC	<i>[Signature]</i>	3/24
REVISION	APPROVED BY	APPROVAL DATE
1	<i>[Signature]</i>	3/24

STD. PLAN NO.

T20-39C