



WL BIKE LANE LINE

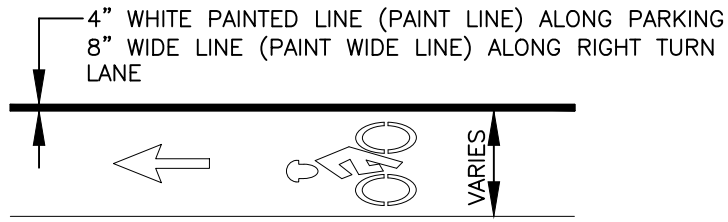

YBS BICYCLE YIELD PAVEMENT MARKING


SEE T29-43D TRAFFIC / VERTICAL SEPARATOR CURB COORDINATE W/ CITY PER APPROVED PRODUCTS




W BIKE EDGE LINE

8" WHITE PAINTED LINE (CROSSHATCH MARKING (TYP.))


VS BIKE LANE BUFFER ZONE AREA MARKING WITH TRAFFIC / VERTICAL SEPARATOR CURB

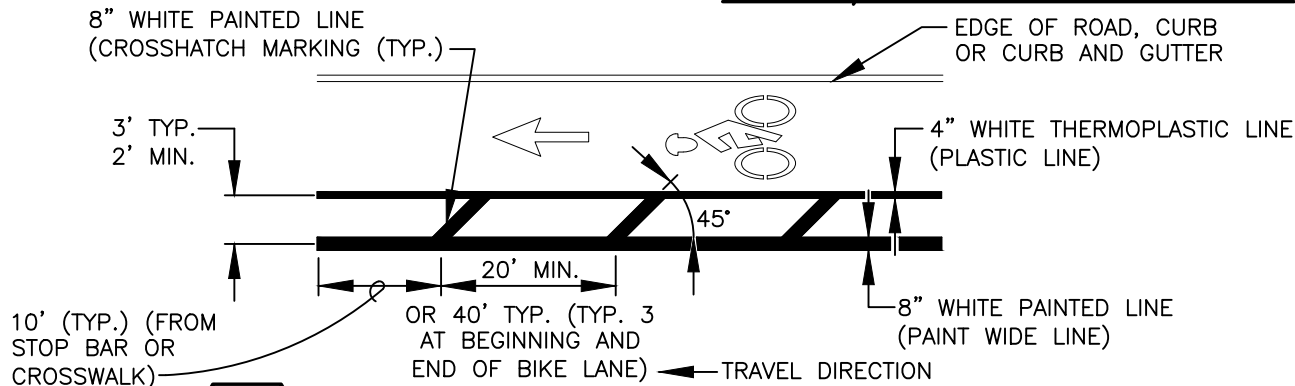

WTL BIKE LANE BUFFER ZONE AREA MARKING

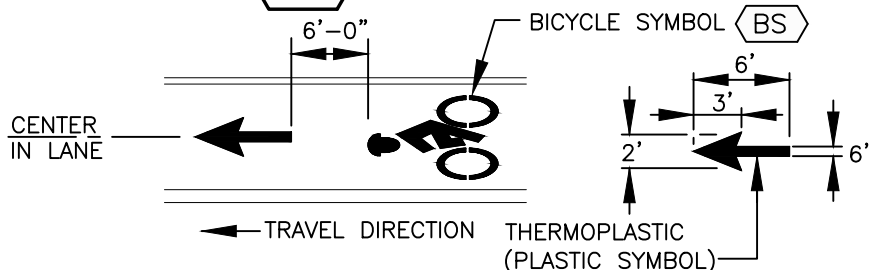

BSA BICYCLE LANE MARKING



BS BICYCLE SYMBOL MARKING

BICYCLE LANE MARKING PLACEMENT LOCATIONS:

- A) AT THE BEGINNING OF BIKE LANES.
- B) AT THE "OUT" SIDE OF THE INTERSECTION.
- C) AT MAJOR CHANGES IN DIRECTION.
- D) AT INTERVALS NOT TO EXCEED 750' MAX FOR SPEEDS 35 MPH OR LESS AND 1000' FOR SPEEDS 40 MPH OR MORE.
- E) AT BOTH SIDES OF THE VEHICULAR RIGHT TURN LANE WHERE BIKE LANE TRANSITIONS FROM EDGE OF ROAD TO BETWEEN THROUGH LANE AND RIGHT TURN LANE, SEE MUTCD FIGURE 9C-4.
- F) HATCH MARKINGS NOT REQUIRED FOR BIKE LANE BUFFER NARROWER THAN 3'.

GENERAL NOTE:

1. SEE WSDOT STANDARD PLAN **BICYCLE LANE SYMBOL LAYOUT M-9.50-xx** AND **SYMBOLS MARKINGS MISCELLANEOUS M-24.60xx** FOR ADDITIONAL INFORMATION.

I:\CITYAPPS\AUTOCAD\STD_DETAILS\DRAWING_FILES\T29-43A.DWG



BIKE LANE MARKINGS AND LEGENDS

CITY OF VANCOUVER
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION DIVISION

DRAWN BY	APPROVED BY	APPROVAL DATE
CDC		3/24
REVISION	APPROVED BY	APPROVAL DATE
1		3/24

STD. PLAN NO.
T29-43A