

24"
30"
NO
PARKING
R8-3
R/W

INSTALL ON TYPE 2 BARRICADES
THROUGHOUT THE WORK AREA 24
HOURS PRIOR TO IMPLEMENTING
TRAFFIC CONTROL.
PRIOR NOTIFICATION OF LOCAL LAW
ENFORCEMENT REQUIRED.

24"
SIDEWALK CLOSED
AHEAD
R9-11
B/W

24"
SIDEWALK CLOSED
R9-9
B/W

24"
SIDEWALKS CLOSED
AHEAD
R9-11
B/W

48"
ROAD
WORK
AHEAD
W20-1
(OPTIONAL)

SIDEWALK DETOUR


LEGEND

TEMPORARY SIGN LOCATION

CHANNELIZING DEVICES

PEDESTRIAN CHANNELIZING DEVICES

TEMPORARY PEDESTRIAN RAMP FOR
SIDEWALKS

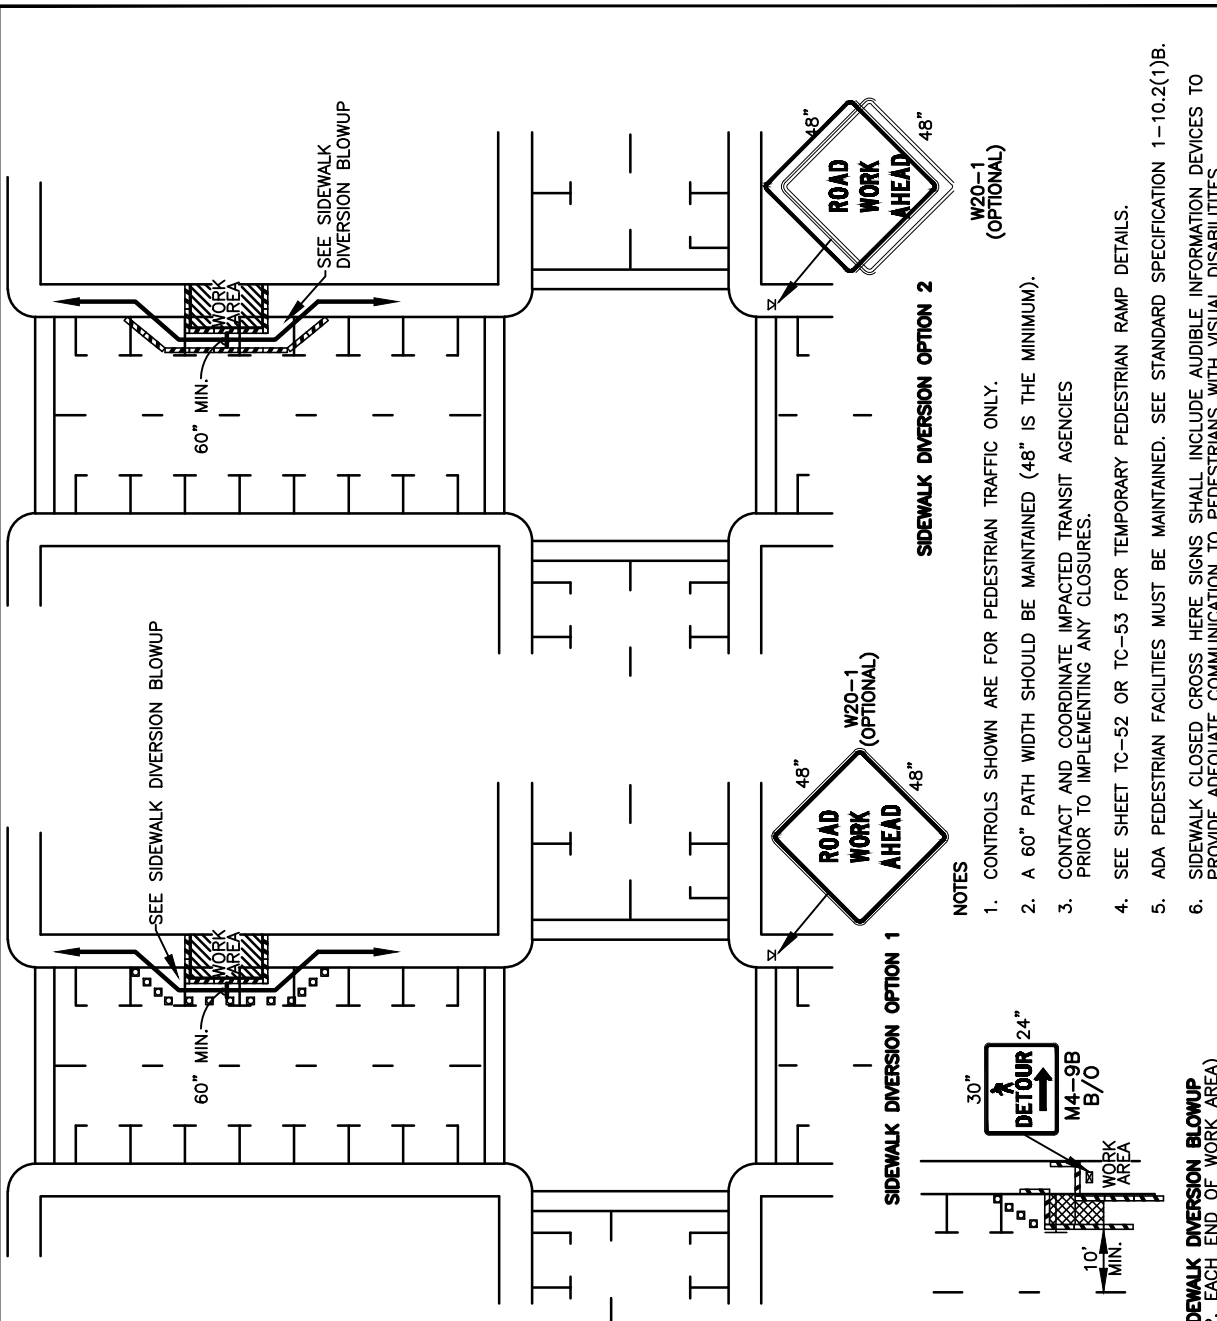

NOTES

1. CONTROLS SHOWN ARE FOR PEDESTRIAN TRAFFIC ONLY.
2. A 60" PATH WIDTH SHOULD BE MAINTAINED (48" IS THE MINIMUM).
3. CONTACT AND COORDINATE IMPACTED TRANSIT AGENCIES PRIOR TO IMPLEMENTING ANY CLOSURES.
4. SEE SHEET TC-52 OR TC-53 FOR TEMPORARY PEDESTRIAN RAMP DETAILS.
5. ADA PEDESTRIAN FACILITIES MUST BE MAINTAINED. SEE STANDARD SPECIFICATION 1-10.2(1)B.
6. SIDEWALK CLOSED CROSS HERE SIGNS SHALL INCLUDE AUDIBLE INFORMATION DEVICES TO PROVIDE ADEQUATE COMMUNICATION TO PEDESTRIANS WITH VISUAL DISABILITIES.

TRAFFIC CONTROL STANDARD PLAN
MID-BLOCK PEDESTRIAN TRAFFIC CONTROL



CITY OF VANCOUVER
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION DIVISION

STD. PLAN NO.
TC16B

DRAWN BY	APPROVED BY	APPROVAL DATE
CDC		9/21
REVISION	APPROVED BY	APPROVAL DATE
2		3/24