

**SIGNING GENERAL NOTES:**


1. SIGNS SHALL BE ALUMINUM SHEETING, FLAT STOCK, IN LENGTHS OF 6" INCREMENTS.
2. SIGN BLADES UNDER 36" IN LENGTH SHALL BE ON 0.080" ALUMINUM. SIGN BLADES 36" OR LONGER SHALL BE ON 0.125" ALUMINUM.
3. EXCEPT FOR THE DOWNTOWN AREA, STREET NAME SIGNS SHALL BE WHITE ON GREEN TYPE IV SHEETING MATERIAL. DOWNTOWN AREA STREET NAMES SHALL HAVE A BROWN BACKGROUND.
4. SIGNS SHALL BE INITIAL 6" UPPER CASE WITH 4" LOWER CASE LETTERS ONLY WHEN BOTH STREETS HAVE A POSTED SPEED OF 25 MPH OR LESS.
5. SIGNS SHALL BE INITIAL 9" UPPER CASE WITH 6" LOWER CASE LETTERS WHEN EITHER CROSS STREET HAVE A POSTED SPEED OF 30 MPH OR HIGHER OR IS AN ARTERIAL.
6. LETTERS AND NUMBERS SHALL BE A COMBINATION OF UPPER AND LOWER CASE "C" SERIES LETTERS. THE "B" SERIES FONT MAY BE USED IF THE SIGN BLADE IS GREATER THAN 48" IN LENGTH.
7. THE PREFIX SHALL BE HALF THE HEIGHT OF THE UNITAL UPPER CASE LETTER AND CENTERED ON THE PRIMARY COPY. IF THE STREET NAME IS A NUMBERED STREET, THEN THE SUFFIX OF THE PRIMARY COPY SHALL BE LOWER CASE SUPERSCRIPIT AT HALF THE HEIGHT OF THE PRIMARY COPY'S LETTER.

**STRIPING GENERAL NOTES:**


1. REMOVAL OF EXISTING STRIPING IS TO BE DETERMINED IN THE FIELD AND IS CONSIDERED INCIDENTAL WORK, STRIPING SHALL BE GROUND OFF OR REMOVED BY HYDROJET AS DIRECTED BY THE ENGINEER.
2. AREAS OF STRIPING NOT RESURFACED SHALL BE FOG SEALED. AREAS TO BE PAINTED SHALL BE FOG SEALED PRIOR TO PAINTING.

TYPE 2 RPM RAISED FACE COLORS	
TYPE 2WR	WHITE AND RED
TYPE 2YR	YELLOW AND RED
TYPE 2YY	YELLOW AND YELLOW
TYPE 2WW	WHITE AND WHITE
TYPE 2W	WHITE - ONE SIDE

FOR ADDITIONAL INFORMATION ON RAISED PAVEMENT MARKINGS SEE WASHINGTON STANDARD SPECIFICATIONS SECTION 9-21.

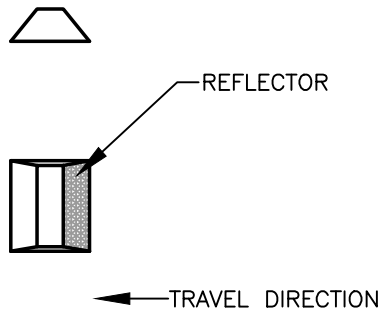

**TYPE 2W RPM**  
REFLECTORS ON ONE SIDE



**TYPE 2WW RPM**  
REFLECTORS ON BOTH SIDES

I:\CITYAPPS\AUTOCAD\STD\_DETAILS\DRAWING\_FILES\T29-20.DWG



**SIGNING AND STRIPING GENERAL NOTES**

CITY OF VANCOUVER  
DEPARTMENT OF PUBLIC WORKS  
TRANSPORTATION DIVISION

DRAWN BY	APPROVED BY	APPROVAL DATE
CDC		8/04
REVISION	APPROVED BY	APPROVAL DATE
7		3/24

STD. PLAN NO.  
**T29-20**