


ADA COMPLIANT CITY  
STANDARD CURB RAMP  
(STYLE VARIES) (TYP.  
BOTH SIDES)

**SECTION A-A**

**PARABOLIC SECTION**

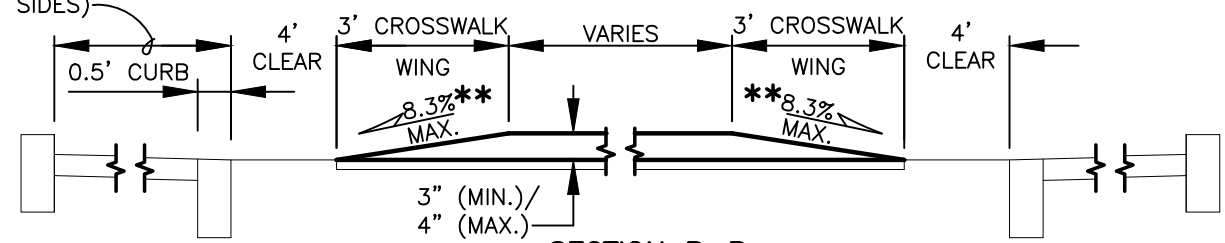

**SECTION B-B**

**GENERAL NOTES:**

1. RAISED CROSSWALK REQUIRES STORM WATER TO BE COLLECTED AND CONVEYED TO AN APPROPRIATE LOCATION.
2. USE THIS OPTION ONLY WITH APPROVAL FROM CITY DIRECTOR.
3. RAISED CROSSWALK SHALL BE CONSTRUCTED OF HOT MIX ASPHALT CLASS 3/8" PG 58H-22 0.3 TO 3.0 ESAL MIX DESIGN UNLESS OTHERWISE SPECIFIED.

**SIGNS:**

- ① INSTALL MUTCD STANDARD SIGNS W11-2 AND W16-7 UNLESS IN SCHOOL WALK ROUTE THEN USE S1-1 AND W16-7. SEE **SIGN MOUNTING DETAILS T29-02 AND T29-03.**
- ② INSTALL MUTCD STANDARD W17-1 ("SPEED BUMP") SIGN 150' (POSTED SPEED=25MPH) OR 175' (POSTED SPEED=30MPH) AHEAD OF RAISED CROSSWALK AT BEGINNING OF A SERIES OF HUMPS OR AS NECESSARY. SEE **SIGN MOUNTING DETAILS T29-02 AND T29-03.**
- ③ IN PLACING SIGNS AT MULTIPLE RAISED CROSSWALKS ALONG A ROADWAY, HAVE THE SIGNS AT THE BEGINNING OF THE INSTALLATION WITH SUPPLEMENTAL SIGN "W16-4" DESIGNATING HOW MANY BLOCK OR MILEAGE, NOT AT EACH RAISED CROSSWALK.

I:\CITYAPPS\AUTOCAD\STD\_DETAILS\DRAWING\_FILES\T02-21.DWG



RAISED CROSSWALK OPTION B			
CITY OF VANCOUVER DEPARTMENT OF PUBLIC WORKS TRANSPORTATION DIVISION		DRAWN BY CDC	APPROVED BY MATE
		APPROVAL DATE 3/06	STD. PLAN NO. <b>T02-21</b>
		REVISION 7	APPROVAL DATE 3/24